



## PRODUCT BRIEF

# 400G / 800G Retimers Bald Eagle

## Supports 56G PAM4 and 28G NRZ

Credo is a leading provider of high performance/low power semiconductor solutions for the data center, enterprise networking and high performance computing markets. Our innovative Serializer-Deserializer (SerDes) technology delivers the bandwidth, scalability and end-to-end signal integrity needed to meet the demands of advanced networks up to 800G with single-lane 28G, 56G, or 112G connectivity.

Credo's purpose-built approach to SerDes design enables our products to be built on mature process technology, providing our customers with a competitive edge.

The CRT502XX family is suitable for both backplane and front panel applications including cloud-scale switches, high density routing platforms and advanced server NIC cards.

12.8Tbps Switch



## Product Family

### CRT50216

- Bidirectional / full duplex 800G (16x56G\*)
- 23mm x 23mm with 0.8mm ball pitch

### CRT5028

- Bidirectional / full duplex 400G (8x56G\*)
- 15mm x 15mm with 0.8mm ball pitch


\* 28G NRZ also supported

## Key Parameters

<b>Channels</b> (bi-directional)	8:16
<b>Data Rate</b> (programmable)	10-56 Gbps
<b>Insertion Loss</b>	30dB LR
<b>Output Voltage</b> (programmable)	100-1,000 mVp-p
<b>Power Supplies</b>	1.8V ± 5% 0.9V ± 5%
<b>Operating Temp</b>	0 to 85°C
<b>Register Interface</b>	MDIO / I <sup>2</sup> C
<b>Process</b>	TSMC 28nm

## Key Features

- Multi-channel bidirectional retimers for 10 - 56Gbps
- Superior random jitter performance
- 35dB reach at 56Gbps
- CEI-56G-VSR/MR/LR-PAM4 compliant
- CEI-28G-LR and CEI-28G-VSR/SR/MR compliant
- TX equalization with programmable main, pre, and post-cursor
- Fully adaptive and programmable RX equalization with CTLE, FFE, and DFE
- Auto negotiation between the link partners on both sides of the retimer (IEEE 802.3 clause 73)
- KR back-channel training (IEEE 802.3 clause 72,92,93,136)
- Input/output polarity switch control
- Register control via I<sup>2</sup>C or standard MDIO interface
- Built in diagnostic features including PRBS generator and checker, PRBS FEC Analyzer, internal eye monitor and analog test point

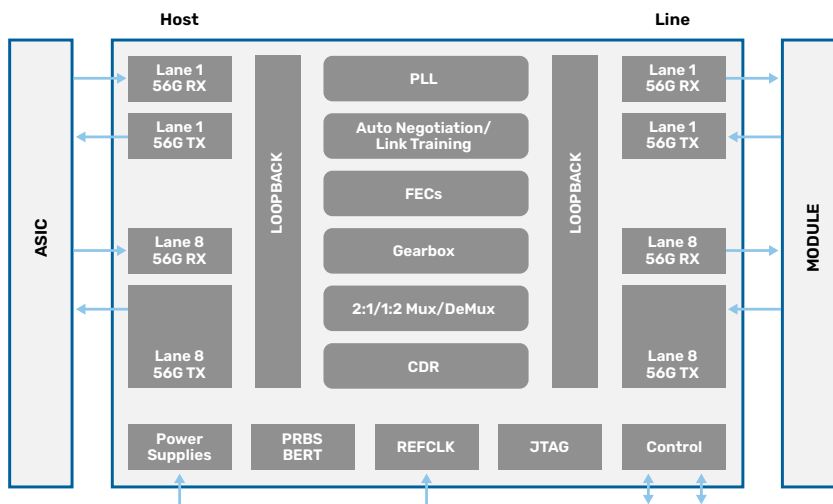

## Supported Standards and Interfaces

- 400G / 200G / 100G / 50G / 40G / 25G / 10G Ethernet
- 400GBASE-SR16/FR8/LR8
- 200GBASE-KR4/CR4/SR4/DR4/FR4/LR4
- 100GBASE-KR2/CR2/SR2
- 100GBASE-CR4/KR4/SR4/LR4/ER4/KP4
- 100GBASE-CR10/SR10
- 50GBASE-CR/KR/SR/FR/LR
- 40GBASE-CR4/KR4/SR4/LR4/ER4
- 25GBASE-CR/CR-S/KR/KR-S/SR
- 10GBASE-KR/CR/SR/LR/ER
- XLAUI
- 25GAUI
- 50GAUI-2/50GAUI-1/LAUI-2
- CAUI-4/CAUI-10/100GAUI-4/100GAUI-2
- 200GAUI-4/200GAUI-8
- 400GAUI-8/400GAUI-16
- CEI-56G-VSR/MR/LR-PAM4
- CEI-28G-VSR/SR/MR
- CEI-25G-LR
- CEI-11G-SR/MR/LR
- KR4 FEC RS(528, 514) for 50G and 100G Ethernet
- KP4 FEC RS(544,514) for 50G and 100G Ethernet

## About Credo

Credo's mission is to advance high-speed connectivity solutions that deliver optimized performance, reliability, energy efficiency, and security for the next generation of AI driven applications, cloud computing, and hyperscale networks.

Optimized for both optical and electrical applications, our solutions support port speeds up to 1.6Tb. At the core of our technology is our proprietary Serializer/Deserializer (SerDes) IP. Our diverse solutions portfolio includes system-level products such as Active Electrical Cables (AECs), a range of Integrated Circuits, including Retimers, Optical DSPs, SerDes chipsets, and SerDes IP Licensing.

For more information please visit [www.credosemi.com](http://www.credosemi.com)  
or email [sales@credosemi.com](mailto:sales@credosemi.com)

© 2025 Credo Semiconductor, Inc. All Rights Reserved. Credo Semiconductor Inc. and the Credo logo are trademarks of Credo Semiconductor Inc. All other marks are the property of their respective owners. This document is for information only. Specifications are subject to change without notice.

REV 031225

