

LOOPBACK AEC SPECIFICATION



Plug & Play Loopback AEC

Active Loopback Test Functionality for 1.6T Based OSFP-XD Host

1.6T (16x106G) OSFP-XD PAM4

Credo's HiWire Loopback Active Electrical Cable (eLBM)

Credo's CACHX1T-C0-HW Loopback AEC is design to provide an active loopback test functionality for 1.6T (16x106G) based OSFP hosts. The module also includes the ability to control a power and thermal load of up to 28W, and well as provide several PRBS, FEC parato, eye height and other loopback functions.

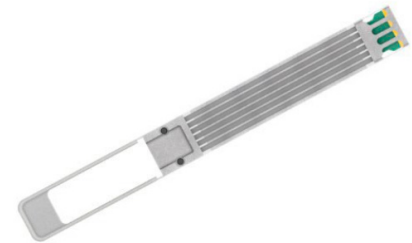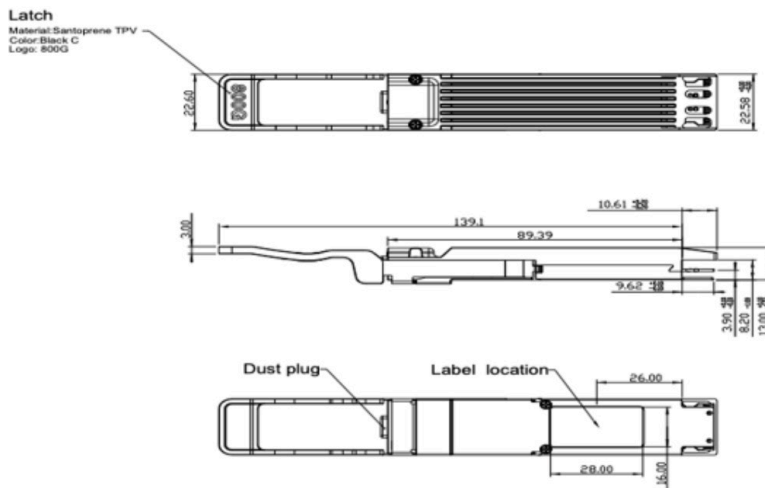

Features

- 1.6T (16x106G) loop back configuration controllable on a lane by lane basis
- PRBS Generation and evaluation on a lane by lane basis
- Eye Height measurement with PRBS or mission mode traffic
- CMIS 5.1 compliant
- Single 3.3V power supply
- Up to 18W resistive thermal load that is software controlled via the CMIS port
- Typ. 14W power dissipation with 16 lanes of loopback enabled
- Thin fin design to allow 2.2-2.6 CFM airflow per port
- Hot pluggable
- RoHS2 compliant
- I²C management interface
- Operating case temperature range: 0° to +70°C

Supported Standards and Interfaces

- Common Management Interface Specification (CMIS) v5.1

Key Features

Parameter	Value
Module Form Factor	QSFP-XD
Number of Data Lanes	16 TX and 16 RX per module (PAM4)
Maximum Aggregate Data Rate	1600Gbps
Nominal Data Rate per Lane	106.25Gbps (PAM4)
Electrical Interface and Pin-out	120-pin edge connector
Pin Description	Per QSFP-XD Hardware Specification
Management Interface	I ² C, serial, timing per Common Management Interface Specification for 8X/16X Pluggable Transceivers V5.1
Power supply (DC)	3.3V

Product Selections

Part Number	Configuration
CACHX1T-C0-HW	1.6T QSFP-XD Loopback AEC

About Credo

Credo's mission is to advance high-speed connectivity solutions that deliver optimized performance, reliability, energy efficiency, and security for the next generation of AI driven applications, cloud computing, and hyperscale networks.

Optimized for both optical and electrical applications, our solutions support port speeds up to 1.6Tb. At the core of our technology is our proprietary Serializer/Deserializer (SerDes) IP. Our diverse solutions portfolio includes system-level products such as Active Electrical Cables (AECs), a range of Integrated Circuits, including Retimers, Optical DSPs, SerDes chipsets, and SerDes IP Licensing.

For more information please visit www.credosemi.com
or email sales@credosemi.com

© 2025 Credo Semiconductor, Inc. All Rights Reserved. Credo Semiconductor Inc. and the Credo logo are trademarks of Credo Semiconductor Inc. All other marks are the property of their respective owners. This document is for information only. Specifications are subject to change without notice.

REV 031225

